US006167875B1

(12) **United States Patent**
French et al.

(10) **Patent No.: US 6,167,875 B1**
(45) **Date of Patent: Jan. 2, 2001**

(54) **MULTIPLE SPARK CAPACITIVE DISCHARGE IGNITION SYSTEM FOR AN INTERNAL COMBUSTION ENGINE**

(75) Inventors: **Michael J. French**; **Mark J. Skrzypchak**, both of Kenosha, WI (US)

(73) Assignee: **Outboard Marine Corporation**, Waukegan, IL (US)

(*) Notice: Under 35 U.S.C. 154(b), the term of this patent shall be extended for 0 days.

(21) Appl. No.: **09/201,363**

(22) Filed: **Nov. 30, 1998**

Related U.S. Application Data

(63) Continuation of application No. PCT/US97/10206, filed on Jun. 19, 1997.
(60) Provisional application No. 60/020,033, filed on Jun. 21, 1996.

(51) **Int. Cl.**[7] **F02P 3/06**
(52) **U.S. Cl.** **123/606**; 123/605
(58) **Field of Search** 123/598, 605, 123/606, 637, 655, 656

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,183,024	*	2/1993	Morita et al.	123/598
5,429,103	*	7/1995	Rich	123/598
5,471,362	*	11/1995	Gowan	361/257

* cited by examiner

Primary Examiner—Noah P. Kamen
Assistant Examiner—Mahmoud M Gimie
(74) *Attorney, Agent, or Firm*—Fletcher, Yoker & Van Someren

(57) **ABSTRACT**

An ignition system for an internal combustion engine that generates more ignition sparks per ignition event, i.e., per cylinder, per cycle, when the engine is operated in the stratified fuel injected mode than when the engine is operated in the homogeneous fuel injection mode.

9 Claims, 8 Drawing Sheets

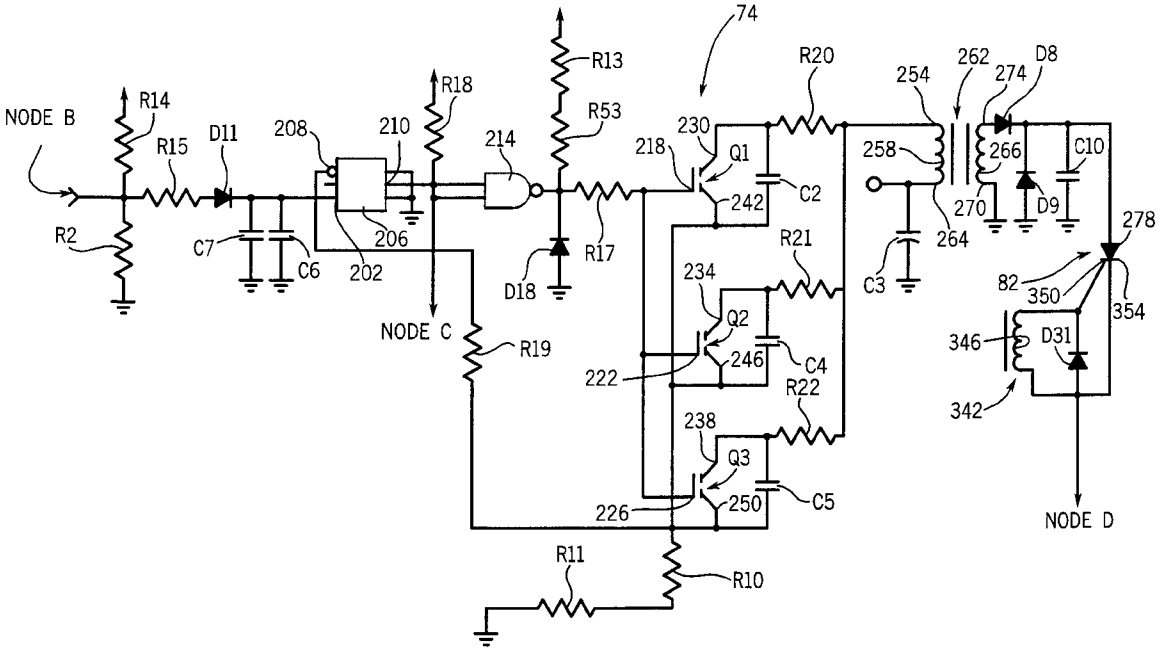
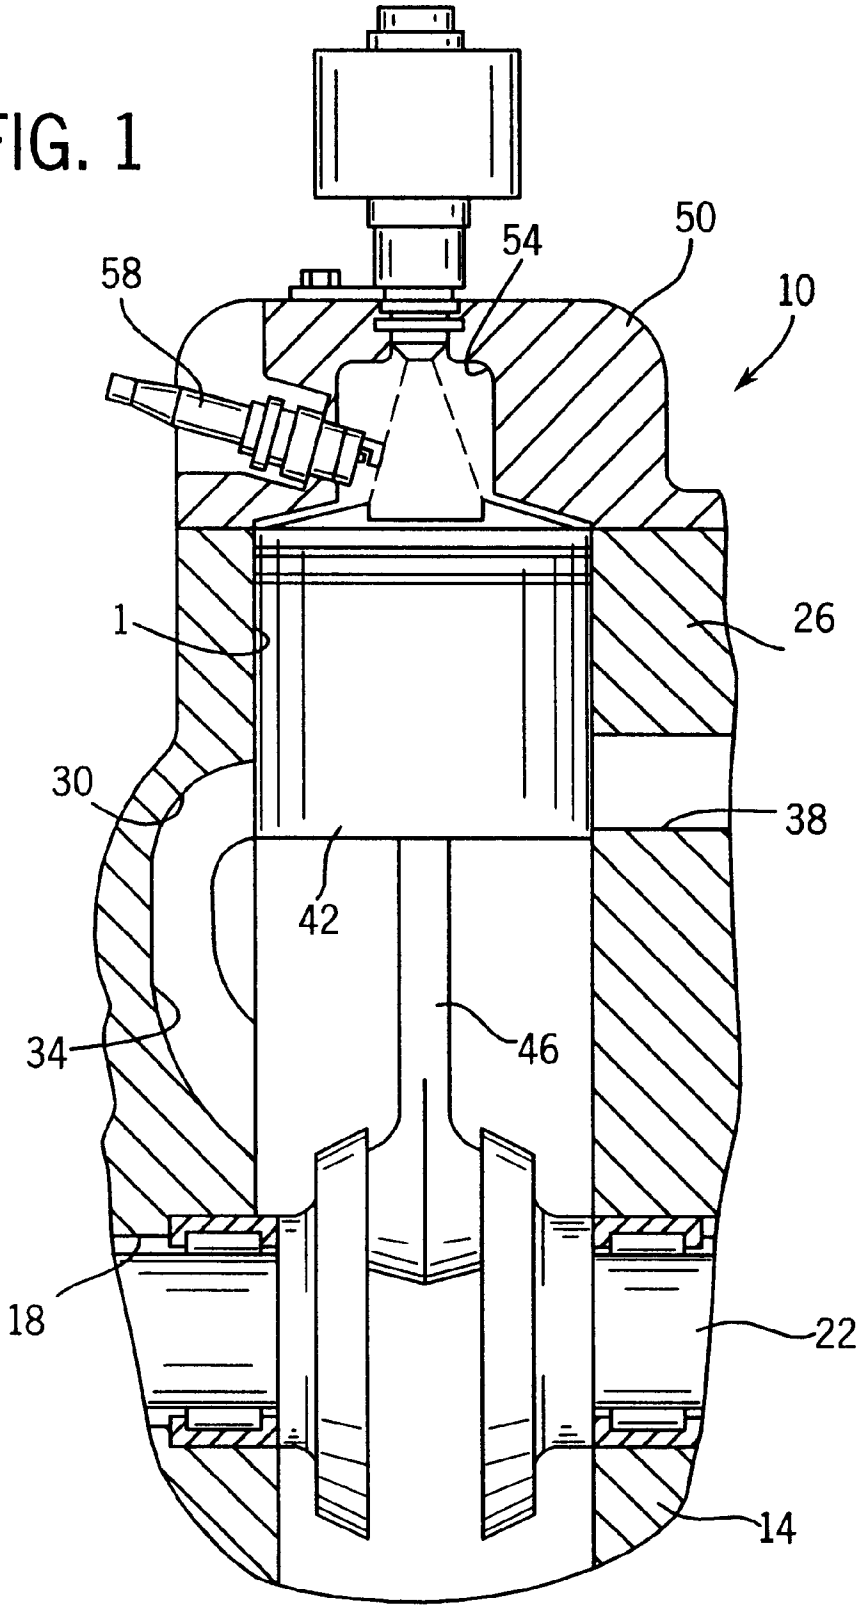


FIG. 1



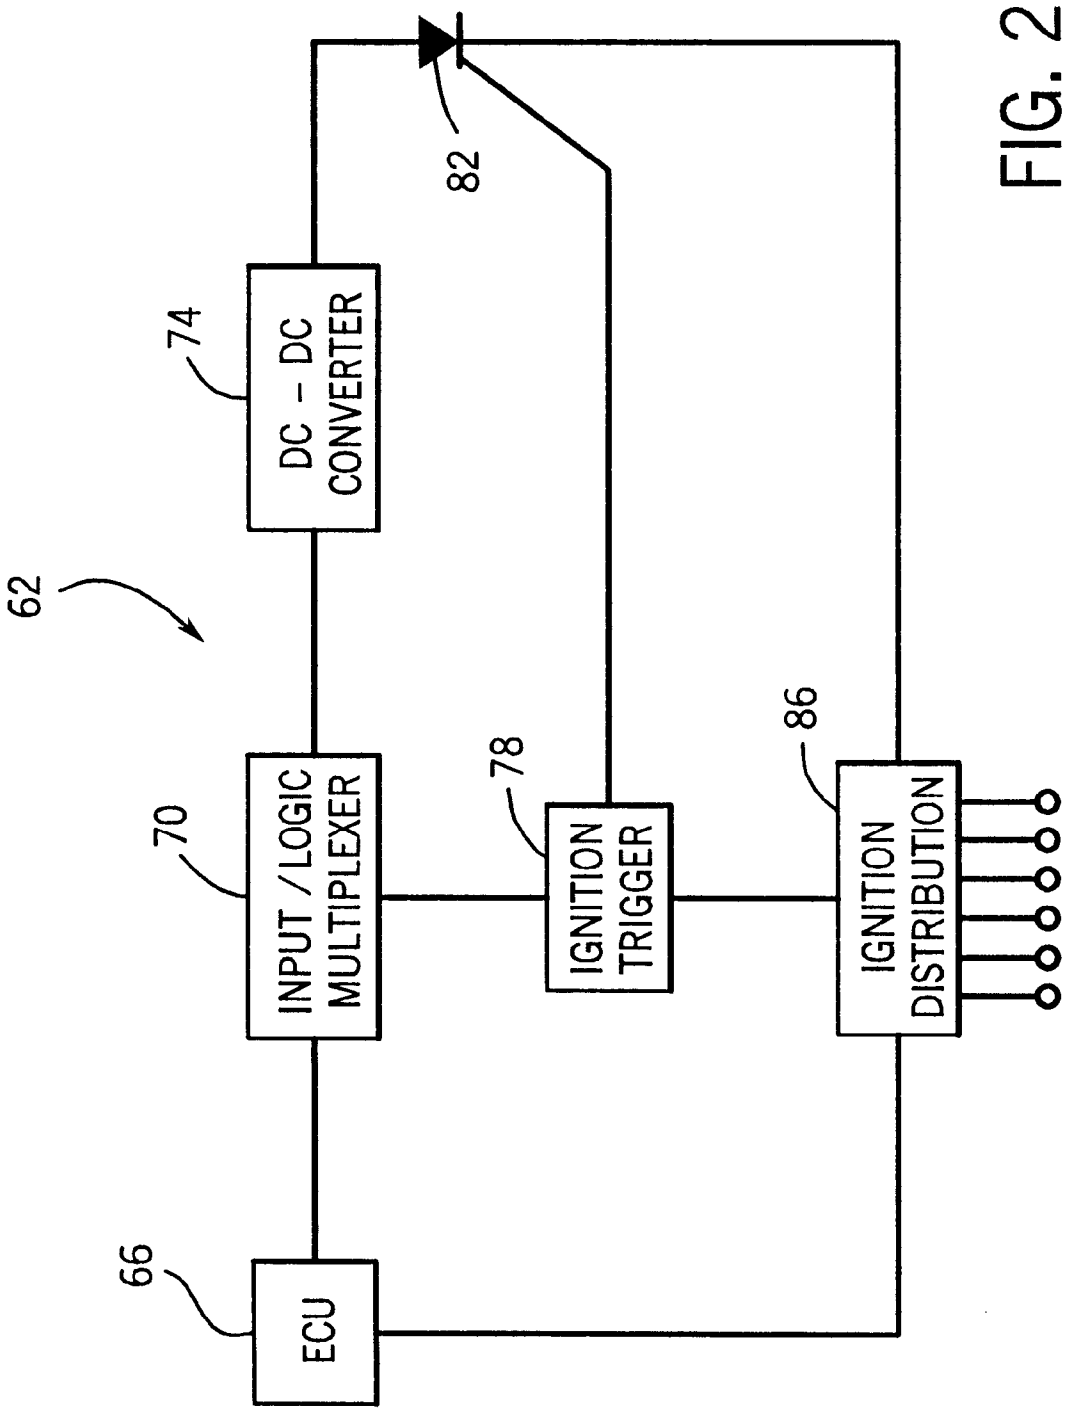

62
82
74
DC – DC CONVERTER
70
INPUT / LOGIC MULTIPLEXER
78
IGNITION TRIGGER
86
IGNITION DISTRIBUTION
66
ECU

FIG. 2

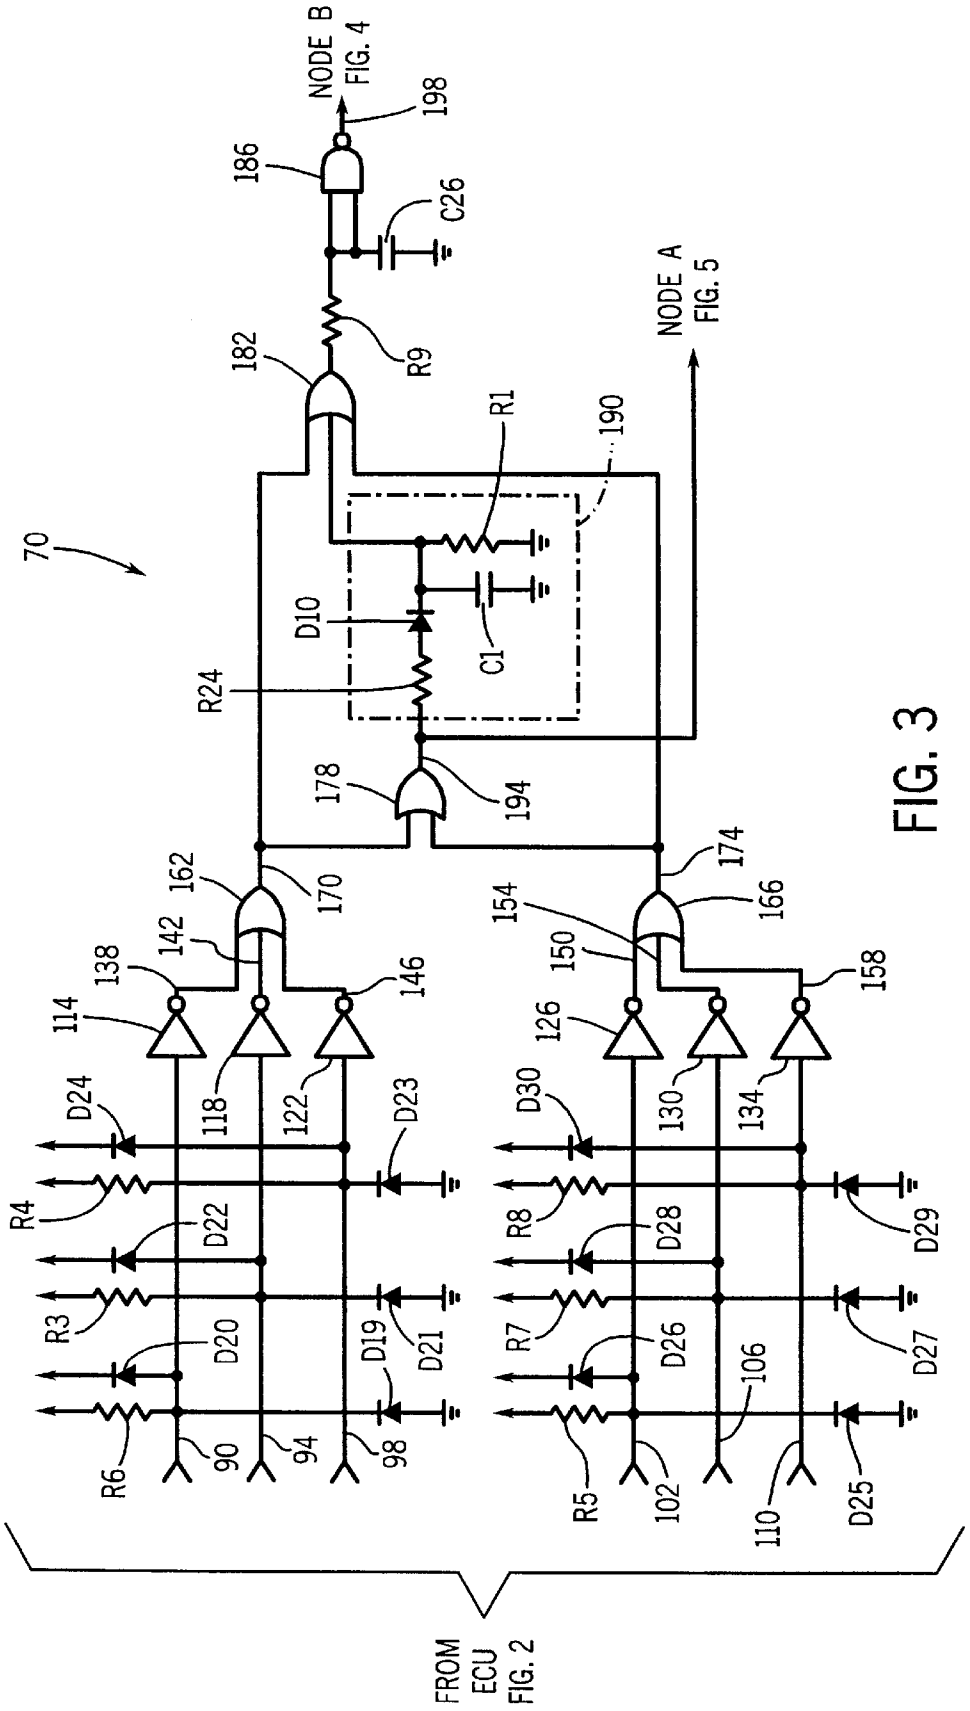

NODE B
FIG. 4
198
186
C26
182
R9
R1
190
NODE A
FIG. 5
70
D10
C1
R24
178
194
162
170
174
154
166
142
150
138
146
158
114
118
122
126
130
134
D24
D23
D30
R4
D22
R8
D28
D29
R3
D20
D19
D21
R7
D26
D27
106
R6
90
94
98
R5
102
110
D25
FROM
ECU
FIG. 2

FIG. 3

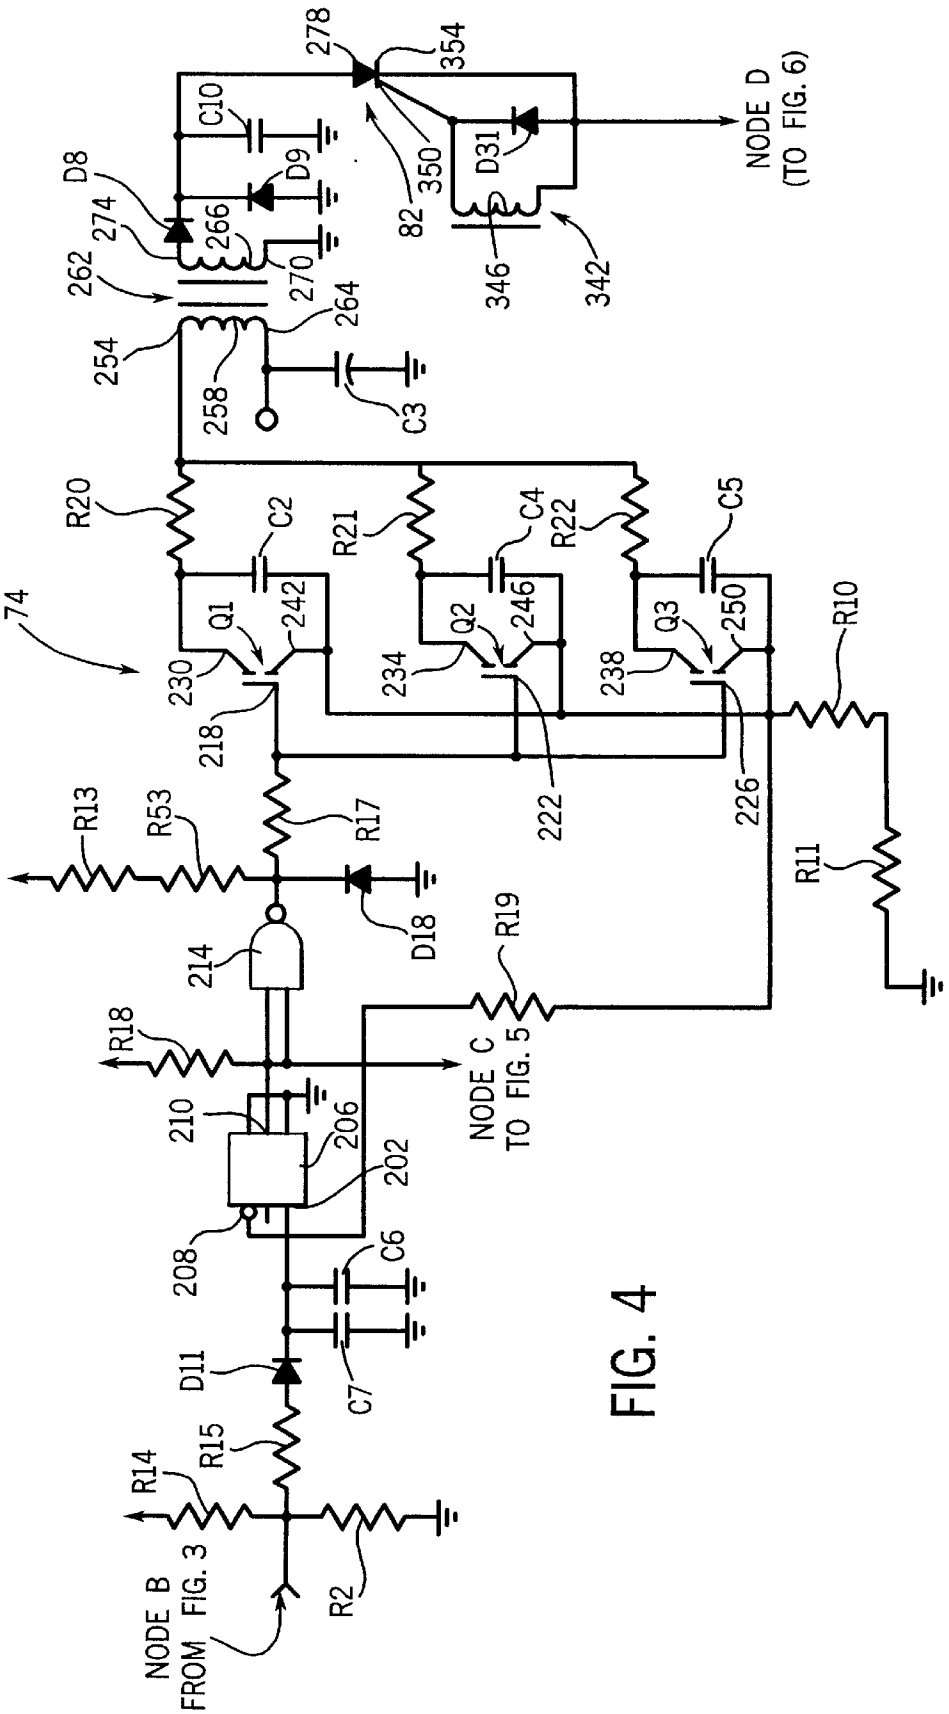

NODE B FROM FIG. 3
NODE C TO FIG. 5
NODE D (TO FIG. 6)
74
R2
R14
R15
D11
C7
C6
202
206
210
208
R18
214
D18
R17
R53
R13
218
222
226
230
234
238
Q1
Q2
Q3
242
246
250
R20
R21
R22
C2
C4
C5
R10
R11
R19
254
258
264
262
274
266
270
C3
D8
C10
D9
278
354
350
82
346
342
D31

FIG. 4

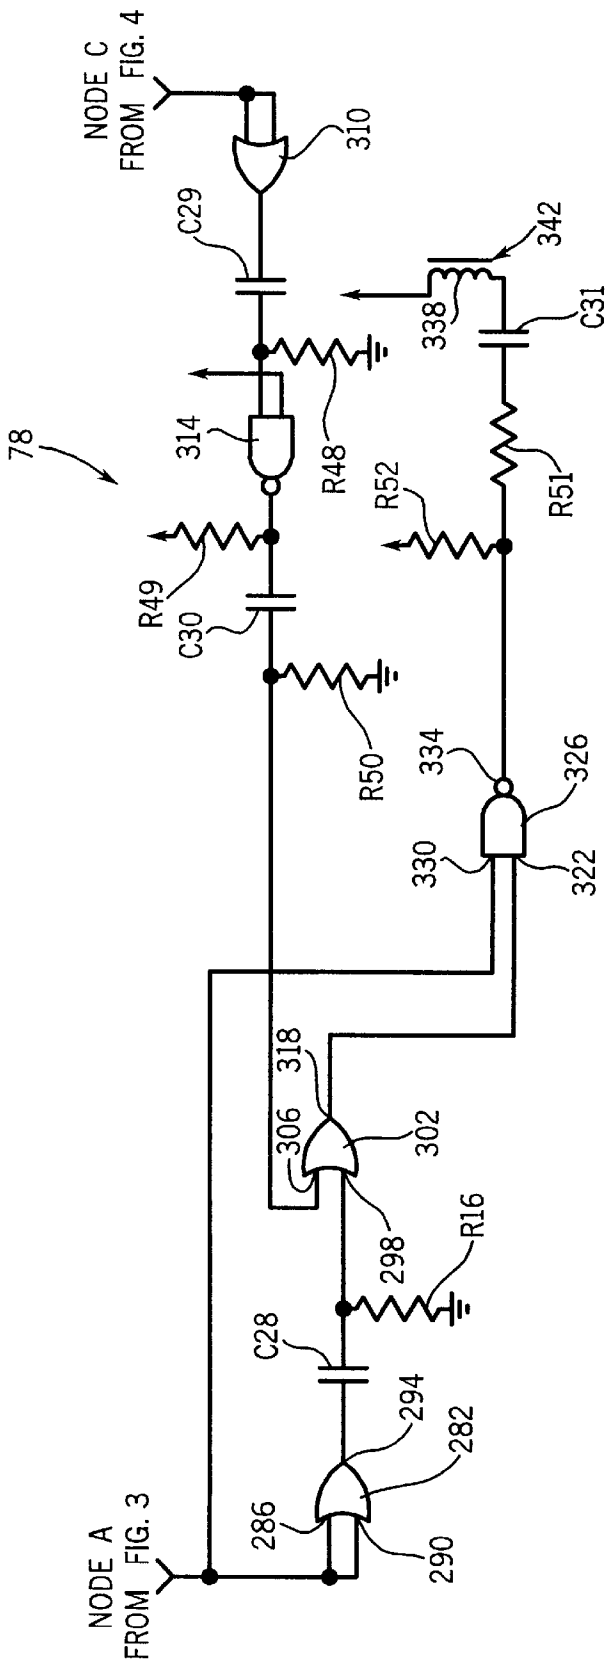

NODE C FROM FIG. 4
310
C29
342
338
C31
78
314
R48
R52
R51
R49
C30
R50
334
326
330
322
318
306
302
298
R16
C28
294
282
286
290
NODE A FROM FIG. 3

FIG. 5

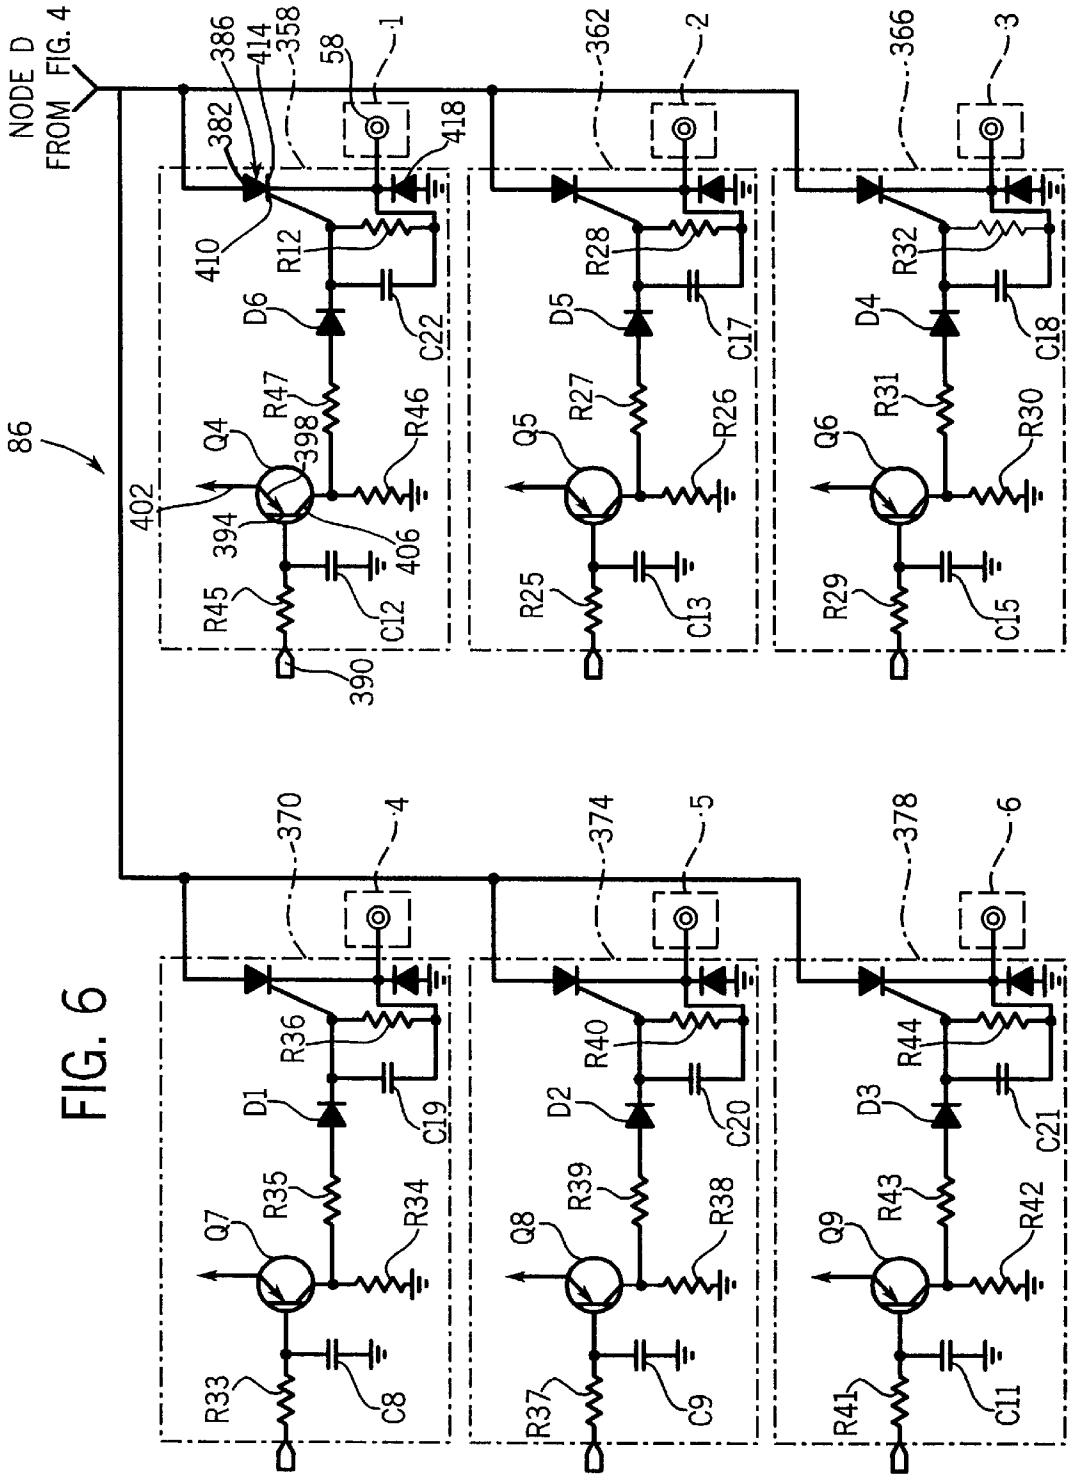

NODE D
FROM FIG. 4
86
382
386
414
358
58
1
418
410
R12
D6
C22
R47
398
R46
Q4
402
394
406
R45
C12
390
362
2
R28
D5
C17
R27
R26
Q5
R25
C13
366
3
R32
D4
C18
R31
R30
Q6
R29
C15
370
4
R36
D1
C19
R35
R34
Q7
R33
C8
374
5
R40
D2
C20
R39
R38
Q8
R37
C9
378
6
R44
D3
C21
R43
R42
Q9
R41
C11

FIG. 6

IGNITION–COIL–ON–TIME (ms)

	y1 / x1	200	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	2000	2500	3000	3500	4000	4500	5000	5500	7000
T	0	5.0	5.0	4.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	2.5	2.0	1.5	1.0	1.0	0.8	0.7	0.5
H	50	5.0	5.0	5.0	5.0	3.0	3.0	3.0	3.0	5.0	5.0	3.0	3.0	3.0	3.0	2.5	2.0	1.5	1.0	1.0	0.8	0.7	0.5
R	100	5.0	5.0	5.0	5.0	3.0	3.0	3.0	3.0	5.0	5.0	5.0	5.0	3.0	3.0	2.5	2.0	1.5	1.0	1.0	0.8	0.7	0.5
O	150	5.0	5.0	5.0	5.0	3.0	3.0	3.0	3.0	3.0	4.0	5.0	5.0	5.0	3.0	2.5	2.0	1.5	1.0	1.0	0.8	0.7	0.5
T	151	3.0	3.0	3.0	2.8	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.5
T	200	0.5	0.5	0.5	0.5	0.5	0.5	0.1	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.5
L	300	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.5
E	400	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.5
	500	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.5
P	600	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.5
O	700	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.5
S	800	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.5
	1000	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.5

FIG. 7

FIG. 8

RPM	IGNITION ON TIME
1000	5.0msec
1500	5.0msec
2000	3.5msec
2500	2.5msec
3000	2.0msec
3500	1.5msec
4000	1.0msec
4500	1.0msec
5000	.8msec
5500	.7msec
6000	.6msec

MULTIPLE SPARK CAPACITIVE DISCHARGE IGNITION SYSTEM FOR AN INTERNAL COMBUSTION ENGINE

CROSS-REFERENCE TO RELATED APPLICATIONS

This Application is a continuation of copending International Application Serial No. PCT/US97/10206, filed Jun. 19, 1997 claiming the benefit of U.S. Provisional Application Ser. No. 60/020,033, filed Jun. 21, 1996.

FIELD OF THE INVENTION

The invention relates to ignition systems for internal combustion engines, and particularly, to a multiple spark capacitive discharge ignition system for such an engine.

In internal combustion engines, it is known that the physical nature of the fuel or fuel/air charge injected into the cylinder varies depending upon engine operating conditions. Specifically, at low engine speeds, the fuel charge is injected into the cylinder in the form of a stratified cloud of fuel particles. The cloud of fuel particles is termed stratified because the density of the fuel particles within the cloud is not constant, i.e., not homogeneous throughout the charge. At higher engine speeds, the fuel charge is injected into the cylinder in what is termed to be a "homogeneous" cloud of fuel particles. The charge is termed homogeneous because the density of fuel particles in the fuel charge is relatively constant throughout the charge.

A single ignition spark or a small number of ignition sparks anywhere within a homogeneous fuel charge will cause complete combustion of the fuel charge. This is not so for a stratified fuel charge. With a stratified injection of fuel, it has been found desirable to provide a greater number of ignition sparks (than is provided under homogeneous conditions) in order to ensure that the stratified fuel charge is adequately or completely ignited. U.S. Pat. Nos. 5,170,760 and 4,653,459 generally illustrate ignition systems for providing a plurality of ignition sparks to ignite a stratified or non-homogeneous fuel charge in the cylinder.

SUMMARY OF THE INVENTION

The invention provides an ignition system for an internal combustion engine having one or more cylinders. The ignition system generates more ignition sparks per ignition event when the engine is operated in the stratified fuel injected mode than when the engine is operated in the homogeneous fuel injection mode. Generally speaking, the system includes an electronic control unit ("ECU") for generating ignition signals for the respective cylinders, an input/logic multiplexer for multiplexing the ECU control signals, a direct current to direct current ("DC—DC") converter for charging an ignition capacitor, a silicon controlled rectifier ("SCR") for discharging the ignition capacitor, an ignition trigger circuit for triggering the SCR and an ignition distribution network for distributing the energy discharged from the ignition capacitor to the appropriate ignition coil.

The DC—DC converter includes a pulse width modulator which generates, in response to the inputs from the ECU, a high frequency output of at least 1000 hertz frequency. Preferably, however, the frequency of the pulse width modulator output is 3.0 khz. The pulse width modulator drives a series of parallel connected high power insulated gate bipolar transistors ("IGBTs") connected through a transformer to a power supply. The power supply voltage is generated by the alternator. Energizing of the transistors by the pulse width modulator at a rate of approximately 3.0 khz causes a flyback voltage to be generated at the primary of the transformer. The flyback voltage is, through mutual inductance, transferred to the secondary of the transformer and "stepped-up" to approximately 200 to 300 volts. This voltage charges an ignition capacitor to approximately 200 to 300 volts. The ignition capacitor is selectively discharged by triggering the SCR to provide electrical energy to the ignition coil which generates a spark to ignite the fuel charge.

The current flowing through the IGBTs is monitored using a current sensing resistor connected in series with the IGBTs. The voltage across the current sensing resistor is "fed back" to the pulse width modulator. The pulse width modulator varies the width of the output pulses generated by the pulse width modulator to compensate for variations in the voltage of the power supply. Thus, as the voltage supplied by the alternator increases, the pulse width of the output of the pulse width modulator decreases. This allows the ignition system to operate effectively from a low voltage of approximately eight volts (which occurs upon engine cranking) to a high voltage of approximately 30 volts (which occurs during high speed engine operation). The use of current sensing to indirectly sense the variations of the supply voltage eliminates the need to compensate the ignition system for variations in the temperature of the system.

It is an advantage of the invention to provide a capacitive discharge ignition system that, in general, energizes the engine spark plug or spark plugs at a higher energy level or for a longer duration when the engine is operating under stratified fuel injection conditions than when the engine is operating under homogeneous engine operating conditions.

It is another advantage of the invention to provide an ignition system that increases the number of strike opportunities per ignition event when the fuel charge is stratified relative to when the fuel charge is homogeneous.

It is another advantage of the invention to provide the ignition sparks at a rate which at least exceeds 1000 hertz.

It is another advantage of the invention to provide an ignition system for an internal combustion engine that utilizes as its voltage source the voltage from the alternator.

It is another advantage of the invention to provide an ignition system for an internal combustion engine that utilizes a transformer which can accommodate larger voltage ranges.

It is another advantage of the invention to provide an ignition system for an internal combustion engine that charges the ignition capacitor using a flyback voltage.

It is another advantage of the invention to provide an ignition system which senses the current flowing through the transformer to eliminate the need for temperature compensation of the ignition system and improve the efficiency of the ignition system.

Other features and advantages of the invention are set forth in the following detailed description and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** is a partial cross section of an internal combustion engine embodying the engine.

FIG. **2** is a block diagram of the ignition system for the internal combustion engine.

FIG. **3** is a detailed schematic of the input/logic multiplexer of the ignition system.

FIG. **4** is a detailed schematic of the DC—DC converter of the ignition system.

FIG. **5** is a detailed schematic of the ignition trigger circuit of the ignition system.

FIG. **6** is a detailed schematic of the ignition distribution circuit of ignition system.

FIG. **7** is a chart which plots ignition coil on time as a function of engine speed and throttle position.

FIG. **8** is a chart which plots the maximum ignition coil on time for a given engine speed.

Before one embodiment of the invention is explained in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of components set forth in the following description or illustrated in the drawings. The invention is capable of other embodiments and of being practiced or carried out in various ways. Also, it is to be understood that the phraseology and terminology used herein is for the purpose of description and should not be regarded as limiting.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Partially shown in FIG. **1** of the drawings is an internal combustion engine **10** embodying the invention. Although any internal combustion engine is appropriate, the internal combustion engine of the preferred embodiment is a two-stroke, direct injected, internal combustion engine having six cylinders (illustrated schematically and labelled **1–6** in FIG. **6**). Cylinder **1** of the engine is illustrated in detail in FIG. **1**. The engine **10** includes a crankcase **14** defining a crankcase chamber **18** and having a crankshaft **22** rotatable therein. An engine block **26** defines the cylinder **1**. The engine block **26** also defines an intake port **30** communicating between the cylinder **1** and the crankcase chamber **18** via a transfer passage **34**. The engine block **26** also defines an exhaust port **38**. A piston **42** is reciprocally movable in the cylinder **1** and is drivingly connected to the crankshaft **22** by a crank pin **46**. The cylinder head **50** closes the upper end of the cylinder **1** so as to define a combustion chamber **54**. A spark plug **58** is mounted on the cylinder head **50** and extends into the combustion chamber **54**.

As shown schematically in FIG. **2** of the drawings, the internal combustion engine **10** also includes an ignition system **62** for providing an ignition spark to the spark plug **58** to ignite fuel in the cylinders **1–6**. The ignition system **62** illustrated in FIG. **2** may be used in an internal combustion engine having any number of cylinders. In the preferred embodiment of the invention, the ignition system **62** generates a plurality of ignition sparks (per cylinder, per cycle) when the fuel charge injected into the cylinder is stratified, and generates fewer sparks (per cylinder, per cycle) when the fuel charge injected into the cylinder is homogeneous.

In general terms, the ignition system **62** includes an electronic control unit ("ECU") **66**, an input/logic multiplexer **70** (shown in detail in FIG. **3**), a direct current to direct current ("DC—DC") converter **74** (shown in detail in FIG. **3**), an ignition trigger circuit **78** (shown in detail in FIG. **4**), a silicon controlled rectifier ("SCR") **82**, and an ignition distribution circuit **86** (shown in detail in FIG. **6**).

Any ECU for an internal combustion engine could be used to operate the ignition system **62**. The ECU **66** generates an ignition control signal for each of the cylinders of the engine. In the embodiment of the engine shown in the drawings, the engine is a six cylinder engine and, accordingly, the ECU **66** generates six ignition control signals, i.e., one ignition control signal per engine cycle for each of the six cylinders.

FIG. **3** illustrates the input/logic multiplexer **70** of the ignition system **62**. As shown in FIG. **3**, the ignition control signals from the ECU **66** (for cylinders one through six) are input to the input/logic multiplexer **70** on input lines **90**, **94**, **98**, **102**, **106**, and **110**. The input lines **90**, **94**, **98**, **102**, **106**, and **110** are connected to inverters **114**, **118**, **122**, **126**, **130**, and **134**, respectively. The inverters **114**, **118**, **122**, **126**, **130**, and **134** have outputs **138**, **142**, **146**, **150**, **154** and **158**, respectively. The outputs **138**, **142** and **146** are connected to OR gate **162** and the outputs **150**, **154** and **158** are connected to OR gate **166**. The outputs **170** and **174** of the OR gates **162** and **166**, respectively, are connected to OR gate **178** and to OR gate **182**. The input/logic multiplexer **70** also includes a delay circuit **190** connected to the output **194** of OR gate **178**. The delay circuit **190** includes resistor R**24**, diode D**10**, capacitor C**1** and resistor R**1**. The output of the delay circuit is connected to the input of OR gate **182** to completely combine or multiplex the ignition control signals from the ECU **66**. The output of OR gate **182** is connected to NAND gate **186** through resistor R**9**. A capacitor C**26** is connected to ground and to the inputs of NAND gate **186**. Resistor R**9** and capacitor C**26** form a time delay circuit. The time delay created by R**9** and C**26** allows the capacitor C**10** to completely discharge before receiving a subsequent energy pulse from the pulse width modulator **206**. If the time delay were not provided, the subsequent energy pulse from the pulse width modulator **206** would reach SCR **82** during the discharge of energy from the capacitor C**10**. This would result in SCR **82** being "held open" by the signal from the pulse width modulator **206**.

FIG. **4** illustrates the DC—DC converter **74** of the ignition system **62**. The DC—DC converter **74** includes a pulse width modulator **206**. The pulse width modulator **206** is a conventional component that is commercially available from a number of manufacturers. In the preferred embodiment, the pulse width modulator **206** is manufactured by National Semiconductor, Inc. and is marketed under part number LM2578. As shown in FIG. **4**, the output **198** of NAND gate **186** is connected via node B to the oscillating input **202** (pin 3 of the LM2578 chip package) of pulse width modulator **206** through an RC circuit comprising resistors R**2**, R**14** and R**15**, capacitors C**6** and C**7**, and a diode D**11**. The pulse width modulator **206** also includes an inverted input **208** (pin 1 of the LM2578 chip package). In the preferred embodiment, pins 5 and 7 of the LM2578 chip package are connected to ground. The pulse width modulator **206** also has an output **210** (pin 6 of the LM2578 chip package) that is connected to a parallel connected bank of insulated gate bipolar transistors ("IGBTs") Q**1**, Q**2** and Q**3**, through NAND gate **214**, and through a resistive network including resistors R**13**, R**53**, R**17** and diode D**18**.

As shown in the drawings, the IGBTs Q**1**, Q**2** and Q**3** include gates **218**, **222**, and **226**, drains **230**, **234** and **238**, and sources **242**, **246** and **250**, respectively. The gates **218**, **222** and **226** are connected (through the resistive network) to the output of the NAND gate **214**, and the drains **230**, **234** and **238** are connected through resistors R**20**, R**21** and R**22**, respectively, to one end **254** of the primary winding **258** of a transformer **262**. The sources **242**, **246**, and **250** are connected to ground via serially connected resistors R**11** and R**10**, and are also connected to the inverted input **208** of pulse width modulator **206**.

The opposite end **264** of the primary winding **258** is connected to a voltage source +V. In the preferred embodiment of the invention, the voltage source +v is the output of the internal combustion engine alternator (not shown). The transformer **262** also includes a secondary winding **266**

connected at one end **270** to ground and at the opposite end **274** to diode D**9** and ignition capacitor C**10** through diode D**8**. The ignition capacitor C**10** is connected to the anode **278** of the SCR **82**. In the preferred embodiment, the transformer is a 1:2 step up transformer.

FIG. **5** illustrates the ignition trigger circuit **78** of the ignition system **62**. The ignition trigger circuit **78** includes an OR gate **282** having inputs **286** and **290** connected to the output of OR gate **178** via node A. The output **294** of the OR gate **282** is connected through an RC circuit including capacitor C**28** and resistor R**16** to a first input **298** of OR gate **302**. The second input **306** of the OR gate **302** is connected to the output **210** of the pulse with modulator **206** through OR gate **310**, an RC circuit including capacitor C**29** and resistor R**48**, NAND gate **314** and an RC circuit consisting of resistor R**49**, capacitor C**30** and resistor R**50**. The output **318** of the OR gate **302** is connected to one input **322** of NAND gate **326**. The other input **330** of NAND gate **326** is connected to the output of OR gate **178** from the input/logic multiplexer **70** via node A. The output **334** of the NAND gate **326** is connected through an RC circuit including resistors R**52** and R**51** and capacitor C**31** to the primary winding **338** (FIG. **5** only) of isolation transformer **342** (shown in FIGS. **4** and **5**). Secondary winding **346** (FIG. **4** only) of the isolation transformer **342** is connected in parallel to diode D**31** and to the triggering gate **350** of the SCR **82**. The cathode **354** of the SCR **82** is connected via node D to the ignition distribution circuit **86** of the ignition system **62**.

Referring to FIG. **6**, the ignition distribution circuit **86** includes ignition triggering modules **358**, **362**, **366**, **370**, **374** and **378**, for each of the internal combustion engine cylinders **1**, **2**, **3**, **4**, **5** and **6**, respectively. Each of the modules is identical and accordingly only the module **358** will be described in detail. The cathode **354** of SCR **82** is connected to the anode **382** of SCR **386**. The input **390** to the module **358** is connected to the ECU **66** to receive the ECU ignition control signal for cylinder **1**. The input **390** is connected to the base **394** of transistor Q**4** through the RC circuit which includes resistor R**45** and capacitor C**12**. The transistor Q**4** includes an emitter **398** connected to a voltage supply **402** and a collector **406** connected to ground through resistor R**46**. The collector **406** is also connected to the gate **410** of the SCR **386** through the RC circuit including resistor R**47**, diode D**6**, capacitor C**22** and resistor R**12**. The SCR **362** includes a cathode **414** that is connected to capacitor C**22** and resistor R**12** and to ignition coil **58** and diode **418** for the cylinder **1**.

Though other components and arrangements of components are possible, the resistors and capacitors employed in the preferred embodiment have the following values.

R**1**—510 Kohm, ⅛/watt;

R**2**–R**8**, R**14**, R**18**, R**24**—1 Kohm, ⅛ watt;

R**10**, R**11**, R**20**–R**22**—0.01 ohm, 2 watt;

R**12**, R**28**, R**32**, R**36**, R**40**, R**44**—100 ohm, ⅛ watt;

R**13**, R**53**—47 ohm, ¼ watt;

R**15**, R**17**—24 ohm, ⅛ watt;

R**16**—82 Kohm, ⅛ watt;

R**19**, R**26**, R**30**, R**34**, R**38**, R**42**, R**46**—10 Kohm, ⅛ watt;

R**25**, R**29**, R**33**, R**37**, R**41**, R**45**—3.3 Kohm, ⅛ watt;

R**27**, R**31**, R**35**, R**39**, R**43**, R**47**—56 ohm, ⅛ watt;

R**48**—249 Kohm, ⅛ watt;

R**49**—5.1 Kohm, ⅛ watt;

R**50**—750 Kohm;

R**51**, R**52**—150 ohm, ⅛ watt;

C**1**, C**28**–C**30**—0.001 microfarad;

C**2**, C**4**, C**5**—100 picofarad;

C**3**—330 microfarad;

C**6**—4700 picofarad;

C**7**, C**8**, C**9**, C**11**–C**13**, C**15**—0.022 microfarad;

C**10**—0.68 microfarad;

C**14**, C**17**–C**24**, C**31**–C**36**—0.1 microfarad;

C**16**, C**25**—100 microfarad.

The selection of the particular gates, diodes, SCRs, transistors and other components (employed in the ignition system **62**) is within the realm of one of ordinary skill in the art.

In operation, the inputs **90**, **94**, **98**, **102**, **106** and **110** are normally at a high voltage level (typically five volts and referred to variously as "high" or "logical '1'"). In order to generate an ignition control signal at a particular input **90**, **94**, **98**, **102**, **106** or **110**, the ECU **66** "pulls" the input to a low voltage level (typically zero volts and referred to variously as "low" or "logical '0'"). The inputs **90**, **94**, **98**, **102**, **106** and **110** are inverted by inverters, respectively, and the ouputs of the inverters are "combined" or multiplexed by OR gates **162**, **166**, **178** and **182** and are buffered by NAND gate **186** for inputting to the DC—DC converter **74**. The output of the OR gate **178** is also input to the ignition trigger circuit **78** and to OR gate **182** through delay circuit **190**. The delay circuit **190** creates a time delay that allows the pulse width modulator **206** to continue to run even after the ignition control signal attributable to the previous cycle returns to the high condition. This assures that the ignition capacitor C**10** remains charged for the beginning of the current cycle, i.e., when the next ignition control signal from the ECU **66** "goes low".

In response to the output of the input/logic multiplexer **70** (from NAND gate **186**) the pulse width modulator **206** generates, on output **210**, an oscillating signal having a frequency of approximately between 1000 hertz and 4500 hertz, but which frequency is preferably approximately 3000 hertz (hz). The oscillating signal drives transistors Q**1**, Q**2**, and Q**3** at the 3000 hz frequency causing current from the alternator to flow through the primary winding **258** of the transformer **262**.

The rapid switching of the current through the transformer **262** generates a flyback voltage that is multiplied and transmitted, through mutual inductance of the transformer **262**, to the secondary winding **266** of the transformer **262**. The voltage appearing at the secondary winding **266** is approximately 200 to 300 volts. This voltage is stored momentarily by the ignition capacitor C**10** until the ignition capacitor C**10** is discharged by triggering of SCR **82**.

The current flow through the primary winding **258** of transformer **262** is monitored by placing current sensing resistors R**10** and R**11** in the current flow path and inputting the voltage across the resistors R**10** and R**11** to the inverted input **208** of pulse width modulator **206**. The pulse width of the pulse width modulator output **210** is changed or modulated in response to this voltage so that the ignition system **62** is effective through a wide range of alternator voltages, i.e., in the preferred embodiment, the alternator voltage range (through which the ignition circuit **62** is effective) is approximately 8 volts to approximately 30 volts. In effect, at low alternator voltages, the pulse width of the output **210** of the pulse width modulator **206** is increased to assure sufficient charge voltage for the ignition capacitor. As the alternator voltage rises, the pulse width of the output **210** of the pulse width modulator **206** decreases. At the beginning of a

cycle, the initial trigger for the SCR **82** is generated by the ignition trigger circuit **78** because there is no output **210** from the pulse width modulator **206** to trigger (via trigger circuit **78**) the SCR **82**. After the initial triggering event, the pulse width modulator output **210**, which is connected to the SCR **82** through the ignition trigger circuit **78**, is used to trigger the discharge of the ignition capacitor C**10**.

The ignition control signals from the ECU **66** are input to the appropriate ignition distribution modules of the ignition distribution circuit **86**. When a particular ignition control signal is generated by the ECU **66**, the ignition control signal triggers the SCR of the respective ignition distribution module and that SCR is "held" open until the ignition control signal is turned off by the ECU **66**. As long as the ignition distribution module SCR is held open, the energy discharged from the ignition capacitor C**10** is transmitted directly to the ignition coil and spark plug connected to that ignition distribution module.

The ignition system is capable of generating a varying number of ignition sparks at the spark plug to increase or decrease the total spark duration according to various engine operating conditions such as engine speed, engine load, throttle position etc. Though various combinations of desired total spark duration as a function of engine operating conditions are appropriate depending upon the circumstances, the desired total spark duration of the preferred embodiment is determined as a function of both the engine speed and the throttle position as set forth in the chart shown in FIG. **7**. Moreover, while the invention has been described in terms of generating a higher number of sparks under stratified engine operating conditions, the higher energy level could also be provided under stratified engine operating conditions in the form of a longer spark duration or a higher spark voltage or a combination of longer spark duration, higher spark voltage and higher number of sparks.

As shown in FIG. **7**, on the "Y" axis of the chart, the numbers zero through one thousand represent relative throttle positions, zero representing the idle position of the throttle, and one thousand representing wide open throttle. The numbers along the "X" axis represent the speed of the engine as measured in crankshaft rotations per minute. The numbers in the body of the chart represent ignition spark on time measured in milliseconds.

Generally, the chart shows a trend toward decreasing the total spark duration (ignition coil on time) with increasing engine speed and with increasing throttle position. Based on the ignition coil on times shown in the chart, the highest number of sparks attained, with the pulse width modulator **206** operating at approximately 3000 hertz, is approximately fifteen (at 5.0 ms of ignition coil on time, e.g., at idle throttle position and 200 rpm), and the lowest number of sparks attained is one (at 0.1 ms of ignition coil on time, e.g., at 500 throttle position and 1100 rpm). At wide open throttle and 7000 rpm, two ignition sparks are generated (0.5 ms of ignition coil on time).

Though, as stated above, there is a general trend toward decreasing the ignition coil on time with increasing speed and increasing throttle position, the ignition coil on time does not decrease continuously with increasing speed and increasing throttle position. Rather, there exist some discontinuities in the general trend toward decreasing ignition coil on time with increasing engine speed and increasing throttle position. These discontinuities exist as a result of empirical evidence that the precise ignition coil on times shown in the chart result in improved engine performance.

FIG. **8** is a chart illustrating the maximum ignition coil on time allowed. Exceeding these on times will result in overlap of the ignition event between cylinders.

Various features and advantages of the invention are set forth in the following claims.

What is claimed is:

1. An ignition circuit for an internal combustion engine, comprising:

a transformer having a primary winding connected to a voltage source and a secondary winding;

a capacitive discharge ignition circuit, having a single ignition capacitor device coupled to the transformer secondary winding; and

an electronic circuit for repetitively generating a flyback voltage on the primary winding of the transformer that is coupled to the secondary winding for charging the single ignition capacitor device, wherein the ignition circuit is operable to produce a plurality of ignition sparks in a spark plug each combustion cycle from the single ignition capacitor device in order to ignite the fuel charge in a cylinder, the electronic circuit being adapted to generate a greater number of sparks during each combustion cycle when a fuel charge in the cylinder is stratified than when the fuel charge in the cylinder is homogeneous.

2. The ignition circuit as recited in claim **1**, wherein the single ignition capacitor device is a single capacitor.

3. The ignition circuit as recited in claim **1**, wherein the ignition circuit generates a plurality of sparks in each cylinder each combustion cycle from the single ignition capacitor device when a fuel charge injected into the cylinder is stratified.

4. An internal combustion engine comprising:

a plurality of cylinders;

a spark plug in each cylinder of the engine, to produce ignition sparks in each cylinder;

a voltage source; and

an ignition circuit electrically coupled to the voltage source and to each spark plug, wherein the ignition circuit is operable to produce a plurality of ignition sparks in each spark plug each combustion cycle from the single ignition capacitor device, comprising:

an electronic control unit for generating ignition control signals;

a pulse width modulator that produces output pulses of varying pulse width in response to ignition control signals;

an electronic switch;

a transformer having a primary winding and a secondary winding; the primary winding being electrically coupled to the pulse width modulator and the electronic switch for generating a flyback voltage in the primary winding that is coupled to the secondary winding.

5. An internal combustion engine comprising:

an engine block defining at least one cylinder for receiving a fuel charge therein;

a spark plug mounted in the engine block and communicating with the at least one cylinder;

a voltage source;

an ignition circuit electrically coupled to each spark plug, wherein the ignition circuit is operable to produce a plurality of ignition sparks in each spark plug each combustion cycle, the ignition circuit being adapted to generate a greater number of sparks during each combustion cycle when a fuel charge in the cylinder is stratified than when the fuel charge in the cylinder is homogeneous, the ignition circuit comprising:

an electronic unit for generating ignition control signals;

a pulse width modulator electrically coupled to the electronic control unit, wherein the pulse width modulator produces an oscillating output in response to the ignition control signals;

a transformer;

a ignition capacitor device;

means for electrically coupling the transformer to the voltage source and to the pulse width modulator to generate a flyback voltage to charge the ignition capacitor device; and

means for electrically coupling the ignition capacitor device to each of the spark plugs.

6. The internal combustion engine as recited in claim **5**, wherein the means for electrically coupling the transformer to the voltage source and to the pulse width modulator to generate a flyback voltage to charge the ignition capacitor includes a bank of insulated gate bipolar transistors electrically connected in parallel, each transistor having a gate, a drain and a source.

7. The internal combustion engine as recited in claim **6**, wherein each gate is electrically coupled to the pulsed output of the pulse width modulator, each drain is electrically coupled to the primary winding of the transformer, and each source is electrically coupled to ground and to the input of the pulse width modulator.

8. The internal combustion engine as recited in claim **5**, wherein the means for electrically coupling the single ignition capacitor device to each of the spark plugs includes an ignition trigger circuit that selectively operates in response to an ignition control signal to enable a discharge path for the single ignition capacitor device.

9. The internal combustion engine as recited in claim **8**, wherein the discharge path for the ignition capacitor includes a silicon controlled rectifier that is operated in response to ignition control signals.

* * * * *