US007317590B2

(12) **United States Patent**
Chan

(10) **Patent No.: US 7,317,590 B2**
(45) **Date of Patent: Jan. 8, 2008**

(54) **FLY ON DEMAND IN SITU CLEARANCE MEASUREMENT CONCEPT IN HARD DISK DRIVE**

(75) Inventor: **Tom Chan**, San Marino, CA (US)

(73) Assignee: **Samsung Electronics Co., Ltd.**, Suwon (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/364,982**

(22) Filed: **Feb. 28, 2006**

(65) **Prior Publication Data**

US 2007/0201158 A1 Aug. 30, 2007

(51) **Int. Cl.**
G11B 21/02 (2006.01)
G11B 27/36 (2006.01)
G11B 5/09 (2006.01)

(52) **U.S. Cl.** **360/75**; 360/31; 360/46

(58) **Field of Classification Search** ..... None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,975,467 B1 * 12/2005 Lewkowicz et al. 360/31
2005/0185312 A1 * 8/2005 Ueda et al. 360/31

FOREIGN PATENT DOCUMENTS

JP 2000195210 A * 7/2000

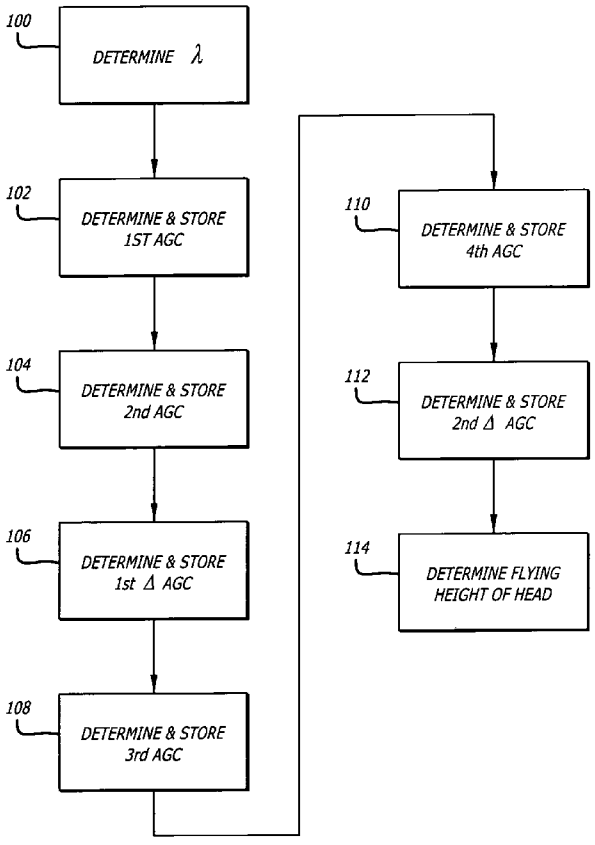
* cited by examiner

Primary Examiner—Wayne Young
Assistant Examiner—Jason Olson
(74) *Attorney, Agent, or Firm*—Ben J. Yorks; Irell & Manella LLP

(57) **ABSTRACT**

A method for determining a flying height of a head of a hard disk drive. The disk drive includes a pre-amplifier and an automatic gain control ("AGC") circuit that are connected to the head. The method includes determining a first automatic gain control value based on AGC values at two delta pre-amplifier gain settings. A second automatic gain control value is determined based on AGC values at two different flying heights. A difference between the flying heights can be determined from the first and second automatic gain control values. If one of the flying heights is set to 0 the difference in gain values is equal to the flying height of the head.

15 Claims, 4 Drawing Sheets



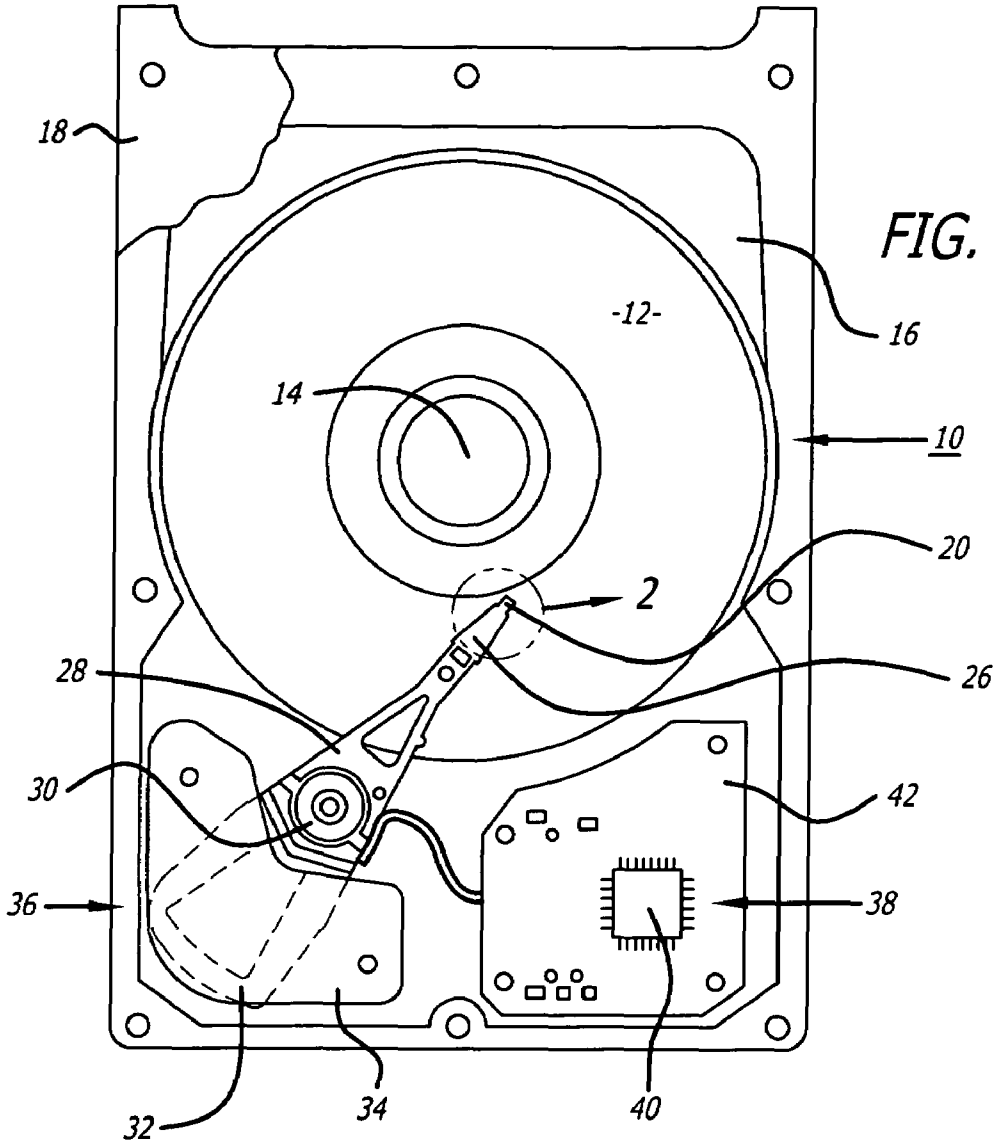


FIG. 1

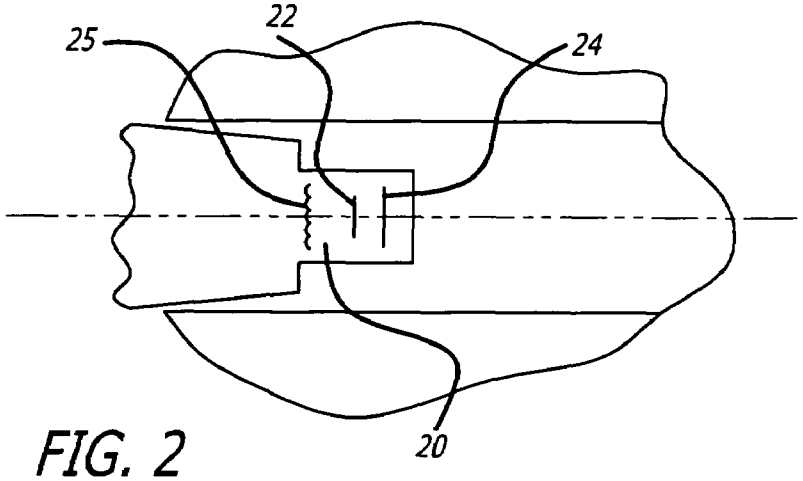


FIG. 2

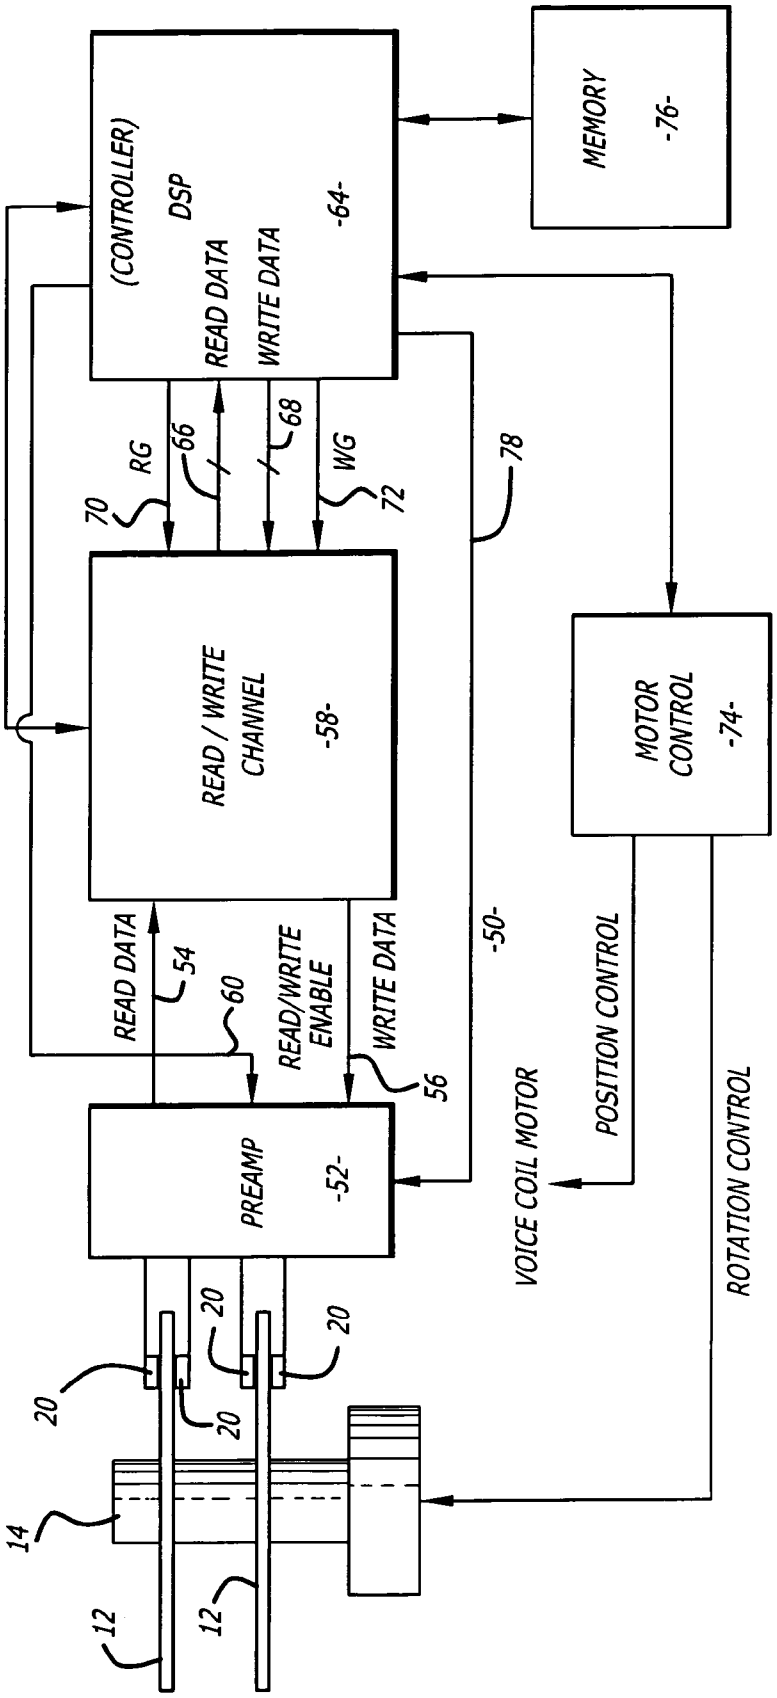

(CONTROLLER)
DSP
-64-
READ DATA
WRITE DATA
MEMORY
-76-
RG
WG
66
68
70
72
78
READ / WRITE
CHANNEL
-58-
MOTOR
CONTROL
-74-
READ DATA
54
60
READ/WRITE
ENABLE
WRITE DATA
56
-50-
PREAMP
-52-
VOICE COIL MOTOR
POSITION CONTROL
ROTATION CONTROL
20
20
20
20
14
12
12

FIG. 3

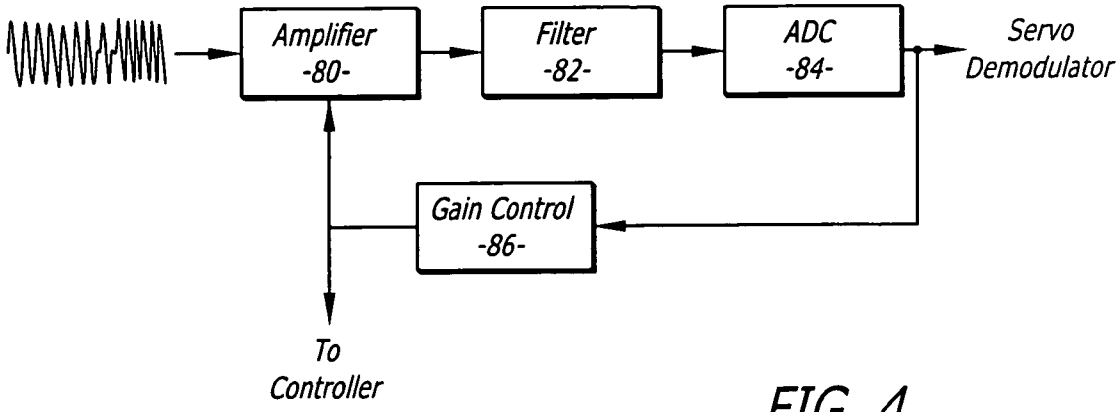

Amplifier
-80-
Filter
-82-
ADC
-84-
Servo
Demodulator
Gain Control
-86-
To
Controller

FIG. 4

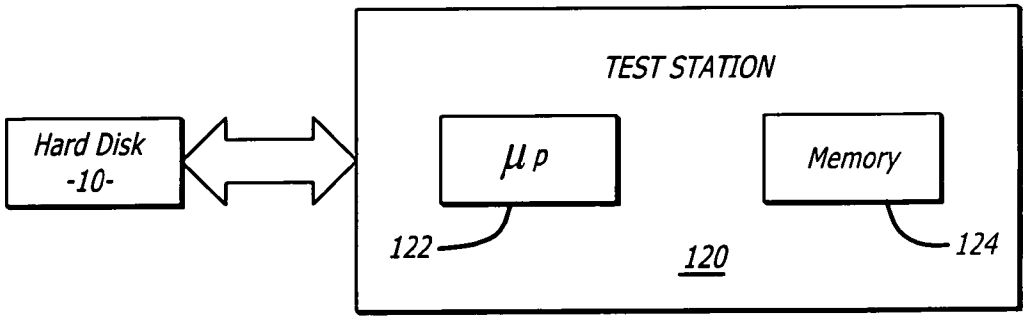

TEST STATION
Hard Disk
-10-
μp
Memory
122
124
120

FIG. 6

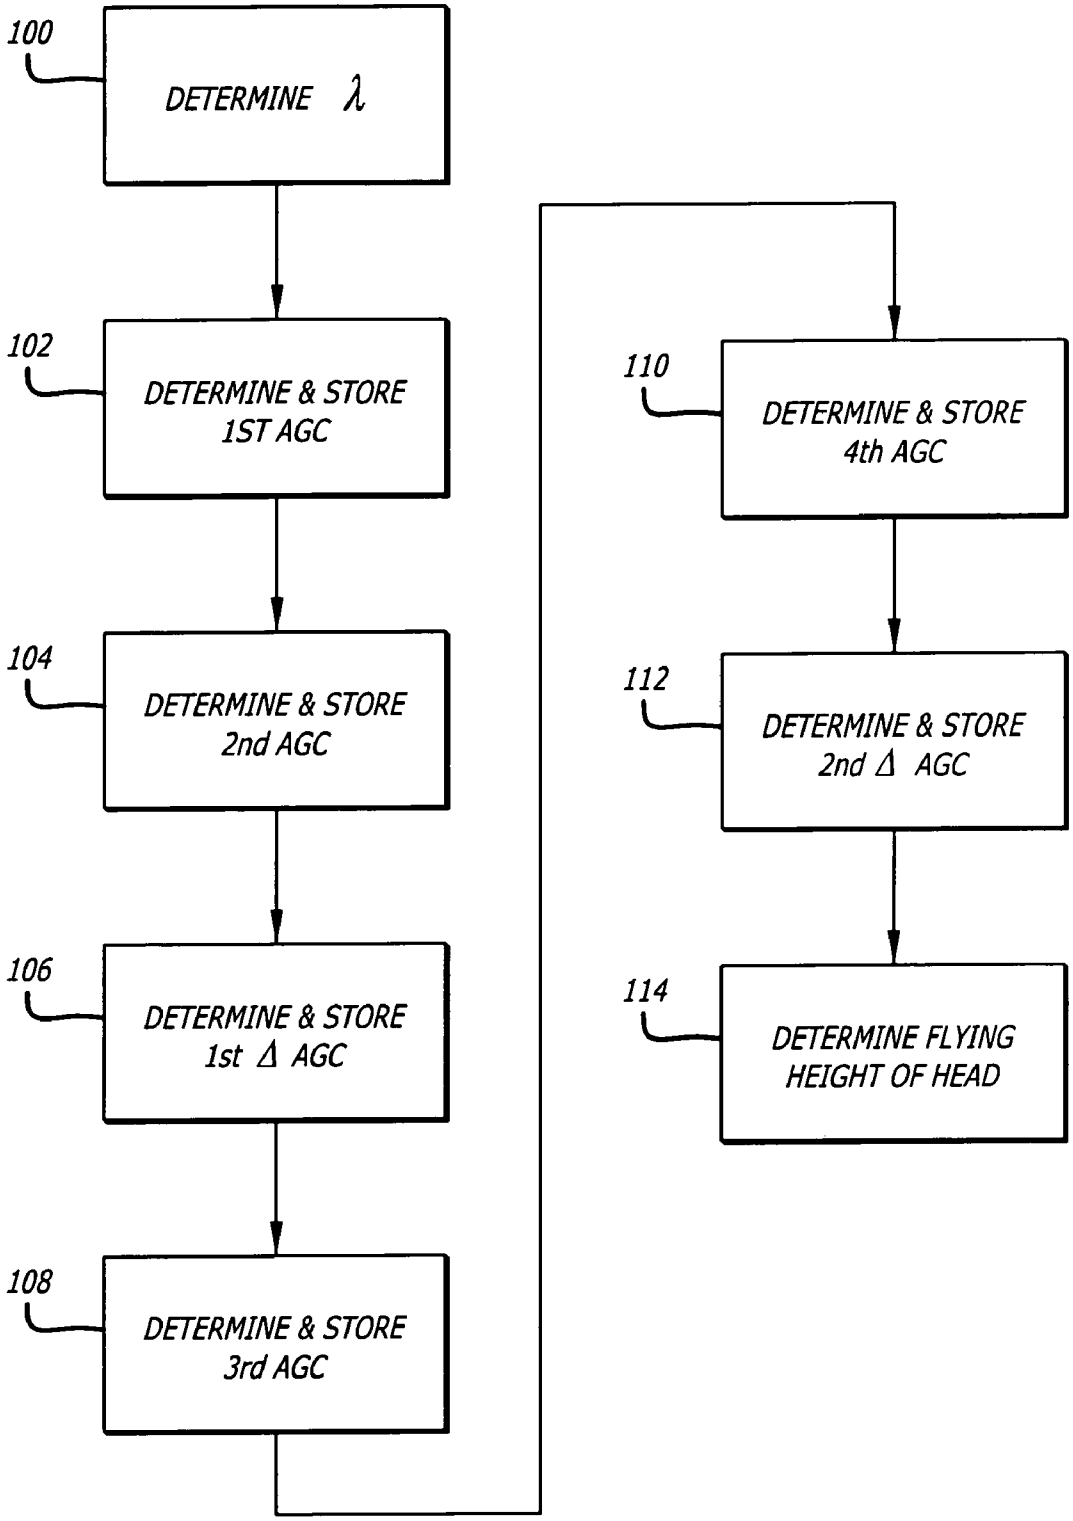

100
DETERMINE λ
102
DETERMINE & STORE 1ST AGC
104
DETERMINE & STORE 2nd AGC
106
DETERMINE & STORE 1st Δ AGC
108
DETERMINE & STORE 3rd AGC
110
DETERMINE & STORE 4th AGC
112
DETERMINE & STORE 2nd Δ AGC
114
DETERMINE FLYING HEIGHT OF HEAD

FIG. 5

FLY ON DEMAND IN SITU CLEARANCE MEASUREMENT CONCEPT IN HARD DISK DRIVE

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a method for determining the flying height of a head of a hard disk drive.

2. Background Information

Hard disk drives contain a plurality of magnetic heads that are coupled to rotating disks. The heads write and read information by magnetizing and sensing the magnetic fields of the disk surfaces. Each head is attached to a flexure arm to create a subassembly commonly referred to as a head gimbal assembly ("HGA"). The HGA's are suspended from an actuator arm. The actuator arm has a voice coil motor that can move the heads across the surfaces of the disks.

The disks are rotated by a spindle motor of the drive. Rotation of the disks creates an air flow within the disk drive. Each head has an air bearing surface that cooperates with the air flow to create an air bearing between the head and the adjacent disk surface. The air bearing eliminates or minimizes the mechanical wear between the head and the disk. The height of the air bearing is commonly referred to as the flying height of the head.

The magnetic field detected by the head is inversely proportional to the flying height of the head. Likewise, the strength of the magnetic field written onto the disk is also inversely proportional to the fly height. A larger fly height will produce a weaker magnetic field on the disk.

To determine head performance it is desirable to measure the flying height of a head. The flying height can be measured with an optical based test stand. In an optical flying height tester, a head "flies" adjacent to a rotating glass substrate. A light beam is directed through the substrate, reflects off of the head and is detected by a detector. The flying height is then computed based on the detected light.

There have been developed heads that include a heater coil. Current is provided to the heater coil to generate heat and thermally expand the head to vary the flying height. These types of heads are commonly referred to as fly on demand ("FOD") heads. It is desirable to determine the flying heights of FOD heads to test and calibrate the drive. It is desirable to test FOD heads in the actual drive assembly. Optical based flying height testers can not be used to test the heads once assembled into the drive. For one thing, the substrates in the drive are not transparent to light. It would be desirable to provide a method to determine the flying height of FOD heads using the existing components of a hard disk drive.

BRIEF SUMMARY OF THE INVENTION

A method for determining a flying height of a head of a hard disk drive that has a pre-amplifier and an automatic gain control circuit. The method includes determining a first delta automatic gain control value from automatic gain control values determined at different pre-amplifier gain settings. A second delta automatic gain control value is then determined from automatic gain control values at different flying heights. A difference in flying heights can then be determined from the first and second delta automatic gain control values.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** is a top view of an embodiment of a hard disk drive;

FIG. **2** is a top enlarged view of a head of the hard disk drive;

FIG. **3** is a schematic of an electrical circuit for the hard disk drive;

FIG. **4** is a schematic showing function blocks of a read channel of the drive;

FIG. **5** is a flowchart showing a process for determining a flying height of a hard disk drive head;

FIG. **6** is a schematic showing a test station connected to a disk drive.

DETAILED DESCRIPTION

Disclosed is a method for determining a flying height of a head of a hard disk drive. The disk drive includes a pre-amplifier and an automatic gain control ("AGC") circuit that are connected to the head. The method includes determining a first delta automatic gain control value based on AGC values at two different pre-amplifier gain settings. A second delta automatic gain control value is determined based on AGC values at two different flying heights. A difference between the flying heights can be determined from the first and second delta automatic gain control values. If one of the flying heights is set to 0 the difference is equal to the flying height of the head. By using delta AGC values, the method eliminates any process or temperature effects on the results.

Referring to the drawings more particularly by reference numbers, FIG. **1** shows an embodiment of a hard disk drive **10** of the present invention. The disk drive **10** may include one or more magnetic disks **12** that are rotated by a spindle motor **14**. The spindle motor **14** may be mounted to a base plate **16**. The disk drive **10** may further have a cover **18** that encloses the disks **12**.

The disk drive **10** may include a plurality of heads **20** located adjacent to the disks **12**. As shown in FIG. **2** the heads **20** may have separate write **24** and read elements **22**. The write element **24** magnetizes the disk **12** to write data. The read element **22** senses the magnetic fields of the disks **12** to read data. By way of example, the read element **22** may be constructed from a magneto-resistive material that has a resistance which varies linearly with changes in magnetic flux. The heads also contain a heater coil **25**. Current can be provided to the heater coil **25** to generate heat within the head **20**. The heat thermally expands the head **20** and moves the read and write elements closer to the disk.

Referring to FIG. **1**, each head **20** may be gimbal mounted to a flexure arm **26** as part of a head gimbal assembly (HGA). The flexure arms **26** are attached to an actuator arm **28** that is pivotally mounted to the base plate **16** by a bearing assembly **30**. A voice coil **32** is attached to the actuator arm **28**. The voice coil **32** is coupled to a magnet assembly **34** to create a voice coil motor (VCM) **36**. Providing a current to the voice coil **32** will create a torque that swings the actuator arm **28** and moves the heads **20** across the disks **12**.

The hard disk drive **10** may include a printed circuit board assembly **38** that includes one or more integrated circuits **40** coupled to a printed circuit board **42**. The printed circuit board **40** is coupled to the voice coil **32**, heads **20** and spindle motor **14** by wires (not shown).

FIG. **3** shows an electrical circuit **50** for reading and writing data onto the disks **12**. The circuit **50** may include a pre-amplifier circuit **52** that is coupled to the heads **20**. The pre-amplifier circuit **52** has a read data channel **54** and a write data channel **56** that are connected to a read/write channel circuit **58**. The pre-amplifier **52** also has a read/write enable gate **60** connected to a controller **64**. Data can be

written onto the disks **12**, or read from the disks **12** by enabling the read/write enable gate **60**.

The read/write channel circuit **58** is connected to a controller **64** through read and write channels **66** and **68**, respectively, and read and write gates **70** and **72**, respectively. The read gate **70** is enabled when data is to be read from the disks **12**. The write gate **72** is to be enabled when writing data to the disks **12**. The controller **64** may be a digital signal processor that operates in accordance with a software routine, including a routine(s) to write and read data from the disks **12**. The read/write channel circuit **58** and controller **64** may also be connected to a motor control circuit **74** which controls the voice coil motor **36** and spindle motor **14** of the disk drive **10**. The controller **64** may be connected to a non-volatile memory device **76**. By way of example, the device **76** may be a read only memory ("ROM"). The non-volatile memory **76** may contain the instructions to operate the controller and disk drive. Alternatively, the controller may have embedded firmware to operate the drive.

FIG. **4** is a schematic showing functional blocks of a read channel and pre-amp of the disk drive. The read channel includes an amplifier **80** coupled to a head(s)(not shown). The amplifier **80** adjusts the amplitude of a signal read by the head. The amplified signal is filtered by filter **82** and converted to a digital bit string by an analog to digital ("ADC") converter **84**.

The gain of the amplifier **80** is adjusted by an automatic gain control circuit **86**. The automatic gain control circuit **86** receives as input the digital output of the ADC **84** and provides an analog control signal to the amplifier **80**.

The automatic gain control signal is inversely proportional to the amplitude of the read signal. A weak signal will result in a larger control signal. A larger control signal will increase the gain of the automatic gain control circuit and boost the amplitude of the read signal. The signal read by the head is inversely proportional to the head fly height. Consequently, the control signal is proportional to the fly height. A larger control signal is indicative of an increasing fly height.

The flying height can be determined by using the AGC control signals of the gain control circuit **86**. The control signals are typically stored in registers of the controller in a digital format. The difference between two flying heights Δd can be determined with the following equation:

$$\Delta d = \frac{\lambda}{2\pi} \cdot \ln(\text{cal_gain_ratio}) \cdot \left(\frac{\text{Delta_AGC_DAC}}{\text{AGC_CAL}}\right) \quad (1)$$

Where; λ=the recording wavelength, which can be determined from the rotational speed of the disk and the location of the head on the disk. AGC_CAL =the difference between two AGC values at different pre-amplifier gain settings. cal_gain_ratio =the ratio of the different pre-amplifier gain settings. Delta_AGC_DAC =the difference between two AGC values at different flying heights.

If one of the flying heights used to determine Delta_AGC_DAC is zero, then the difference Δd is the absolute flying height of the head.

FIG. **5** is a flowchart showing a method for determining a flying height. In step **100** the recording wavelength is determined. In step **102** a pre-amplifier gain is set and a first AGC value is determined and stored. In step **104** the pre-amplifier gain is changed and a second AGC value is determined and stored. In step **106** the difference between the first and second AGC values is computed and stored.

λ is determined. In step **102** a pre-amplifier gain is set and a first AGC value is determined and stored. In step **104** the pre-amplifier gain is changed and a second AGC value is determined and stored. In step **106** the difference between the first and second AGC values is computed and stored.

In step **108** the flying height is reduce to zero and a third AGC value is determined and stored. The flying height can be reduced by providing current to the coil of an FOD head. In step **110** the flying height is varied to a non-zero value and a fourth AGC is determined and stored. In step **112**, the difference between the third and fourth AGC values is computed and stored. In step **114**, the flying height is determined using equation (1).

This process may be performed by a test station **120** that is connected to the drive **10** as shown in FIG. **6**. The test station **120** may contain a controller **122**, memory **124** and other associated circuitry. The controller **122** may perform the test process in accordance with data and operations stored in memory **124**. The memory **124** may also store the various data, such as AGC values, recording wavelength, that are used to compute the flying height. The test station **120** can be used to test heads that are assembled into a hard disk drive assembly. The heads can also be tested individually on a separate test station using the process described. The separate test station could be similar to the embodiment shown in FIG. **3**, wherein the station includes the components shown except the heads which are loaded and unloaded from the station.

While certain exemplary embodiments have been described and shown in the accompanying drawings, it is to be understood that such embodiments are merely illustrative of and not restrictive on the broad invention, and that this invention not be limited to the specific constructions and arrangements shown and described, since various other modifications may occur to those ordinarily skilled in the art.

What is claimed is:

1. A method for determining a flying height of a head of a hard disk drive that has a pre-amplifier and an automatic gain control circuit that processes an automatic gain control value, comprising:

determining a first automatic gain control value at a first pre-amplifier gain setting;

determining a second automatic gain control value at a second pre-amplifier gain setting;

determining a first delta automatic gain control value from said first and second automatic control values;

determining a third automatic gain control value at a first flying height;

determining a fourth automatic gain control value at a second flying height;

determining a second delta automatic gain control value from said third and fourth automatic gain control values;

determining a difference in the first and second flying heights from said first and second delta automatic gain control values.

2. The method of claim **1**, wherein the first flying height is zero.

3. The method of claim **1**, wherein the first and second flying heights are established by varying a current to a coil of the head.

4. The method of claim **1**, further comprising determining a recording wavelength that is used to determine the difference between the first and second flying heights.

5. The method of claim 1, wherein the difference in the first and second flying heights is computed from the following equation:

$$\Delta d = \frac{\lambda}{2\pi} \cdot \ln(\text{cal_gain_ratio}) \cdot \left(\frac{\text{Delta_AGC_DAC}}{\text{AGC_CAL}} \right) \quad (1)$$

Where:

λ=the recording wavelength, which can be determined from the rotational speed of the disk and the location of the head on the disk;

AGC_CAL=the difference between two AGC values at different pre-amplifier gain settings;

cal_gain_ratio=the ratio of the different pre-amplifier gain settings;

Delta_AGC_DAC=the difference between two AGC values at different flying heights.

6. A test stand used to determine a flying height of a head of a hard disk drive that has a pre-amplifier and an automatic gain control circuit, comprising:

a spindle motor that rotates a disk;

a head coupled to said disk;

a circuit coupled to said head, said circuit includes a pre-amplifier and an automatic gain control circuit, said circuit further including a controller that performs a process, said process includes:

determining a first automatic gain control value at a first pre-amplifier gain setting;

determining a second automatic gain control value at a second pre-amplifier gain setting;

determining a first delta automatic gain control value from said first and second automatic control values;

determining a third automatic gain control value at a first flying height;

determining a fourth automatic gain control value at a second flying height;

determining a second delta automatic gain control value from said third and fourth automatic gain control values;

determining a difference in the first and second flying heights from said first and second differential automatic gain control values.

7. The test stand of claim 6, wherein the first flying height is zero.

8. The test stand of claim 6, wherein the first and second flying heights are established by varying a current to a coil of the head.

9. The test stand of claim 6, further comprising determining a recording wavelength that is used to determine the difference between the first and second flying heights.

10. The test of claim 6, wherein the difference in the first and second flying heights is computed from the following equation:

$$\Delta d = \frac{\lambda}{2\pi} \cdot \ln(\text{cal_gain_ratio}) \cdot \left(\frac{\text{Delta_AGC_DAC}}{\text{AGC_CAL}} \right) \quad (1)$$

Where:

λ=the recording wavelength, which can be determined from the rotational speed of the disk and the location of the head on the disk;

AGC_CAL=the difference between two AGC values at different pre-amplifier gain settings;

cal_gain_ratio=the ratio of the different pre-amplifier gain settings;

Delta_AGC_DAC=the difference between two AGC values at different flying heights.

11. An apparatus that contains a program for determining a flying height of a head of a hard disk drive that has a pre-amplifier and an automatic gain control circuit, comprising:

a program storage medium that contains a program which causes a controller to determine a first automatic gain control value at a first pre-amplifier gain setting, determine a second automatic gain control value at a second pre-amplifier gain setting, determine a first delta automatic gain control value from said first and second automatic control values, determine a third automatic gain control value at a first flying height, determine a fourth automatic gain control value at a second flying height, determine a second delta automatic gain control value from said third and fourth automatic gain control values, determine a difference in the first and second flying heights from said first and second differential automatic gain control values.

12. The apparatus of claim 11, wherein said first flying height is zero.

13. The apparatus of claim 11, wherein the first and second flying heights are established by varying a current to a coil of the head.

14. The apparatus of claim 11, further comprising determining a recording frequency that is used to determine the difference between the first and second flying heights.

15. The apparatus of claim 11, wherein the difference in the first and second flying heights is computed from the following equation:

$$\Delta d = \frac{\lambda}{2\pi} \cdot \ln(\text{cal_gain_ratio}) \cdot \left(\frac{\text{Delta_AGC_DAC}}{\text{AGC_CAL}} \right) \quad (1)$$

Where:

λ=the recording wavelength, which can be determined from the rotational speed of the disk and the location of the head on the disk;

AGC_CAL=the difference between two AGC values at different pre-amplifier gain settings;

cal_gain_ratio=the ratio of the different pre-amplifier gain settings;

Delta_AGC_DAC=the difference between two AGC values at different flying heights.

* * * * *